



Similar Image

ISO-KF Flexible Hose

DN-40 Flexible Stainless Steel Hose, 24"


Part number: FH-150-24-2NW



ISO-KF Flexible Hose

DN-40 Flexible Stainless Steel Hose, 24"

- Dampen out pump vibrations with a flex coupling
- Easily join two mis-aligned ports using a flex hose
- Choices for different flexibility options
- Standard lengths and flange combinations offered, with others available

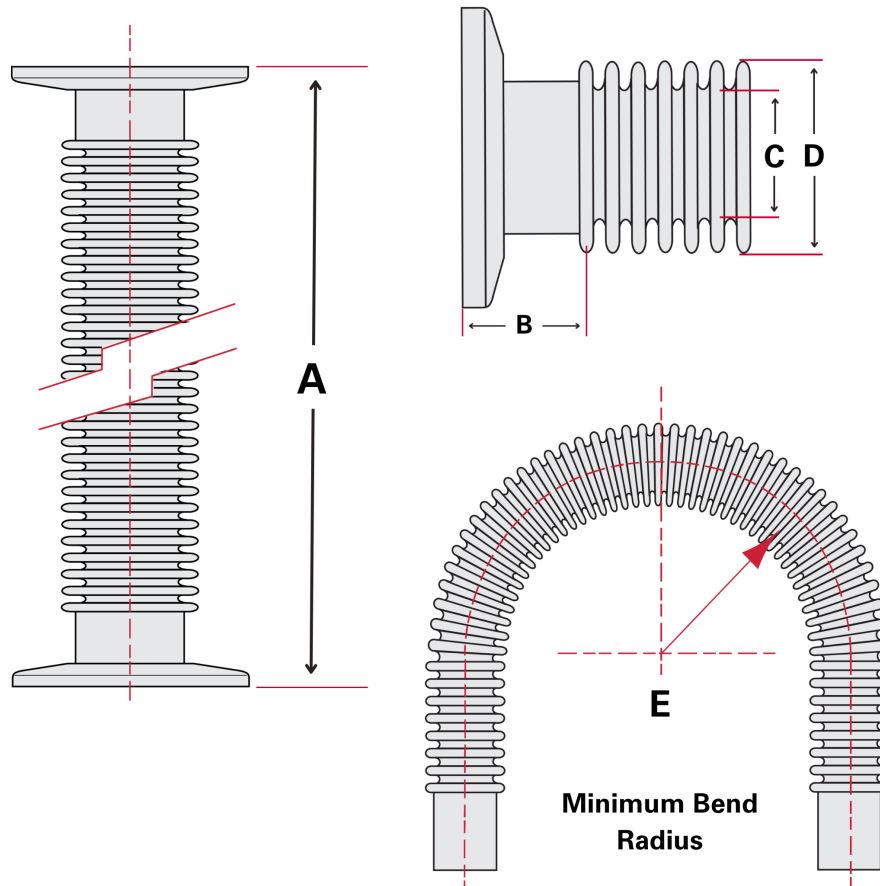

Part Number: FH-150-24-2NW

Parameters	Specifications	Dimensions (in inches)	
Flange Type / Size	DN 40 ISO-KF	Dim A	24"
Nominal Hose Diameter	1.5"	Dim B	< 1.7"
Length Tolerance	+/- 0.25" plus 1% of nominal length ordered	Dim C	> 1.5"
Hose Material	316 or 321 SS	Dim D	< 2.1"
Flange & Cuff Material	304 SS	Dim E	2.3"
Vacuum Range	Elastomer Seal (HV): $> 1 \times 10^{-8}$ mbar to 1 bar Metal Seal (UHV): $> 1 \times 10^{-10}$ mbar to 1 bar		
Temperature Range	Elastomer Seal (HV): -20°C to 150°C Metal Seal (UHV): -200°C to 300°C		
Weight	1.08 lbs		

