



Similar Image



Water cooled power feedthrough

NW-50 water cooled medium current copper feedthrough, four conductors


Part number: MCF-NW-50-4W

Water cooled power feedthrough
NW-50 water cooled medium current copper feedthrough, four conductors

- 12KVDC
- Metal Seal -270°C to 450°C
- Elastomer Seal -20°C to 200°C



Similar Image

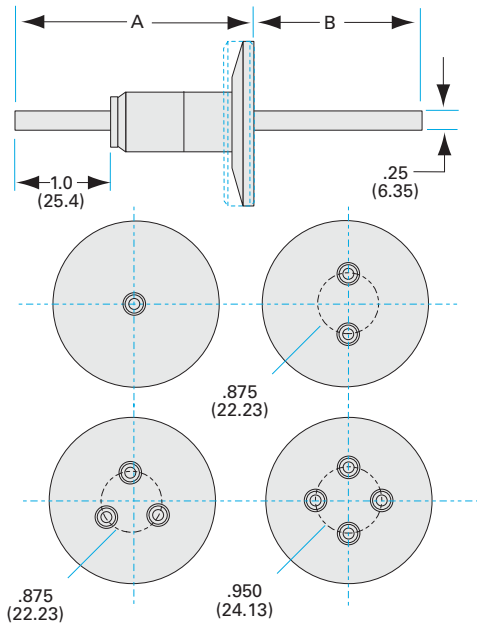

Dimensions (in inches)	
Dim A	3.23"
Dim B	4.03"
Dim C	0.250"
Dim D	1.00"
Dim E	0.950"

MCF-NW-50-4W

Parameters	Specifications
Power Feedthrough Type	Medium Current Feedthrough
# Conductors	Four
Conductor Material	OHFC Copper
Flange Size / Type	DN 50 ISO-KF
Flange Material	304 Stainless
Vacuum Range	1 · 10 ⁻⁸ mbar to 1 bar (high vacuum)
Temperature Range	-20 °C to 200 °C
Voltage Rating	12 KV DC
Electrical Connector	MCF-VC
Weight	0.81 lbs

VACUUM SOLUTIONS FOR INDUSTRY & RESEARCH

Nor-Cal Products is a premier global source for custom and standard high and ultra-high vacuum chambers and components critical to the success of industrial, semiconductor, coating, analytics, and research applications. We offer an extensive selection of vacuum line fittings, hardware, valves and components which complement our custom manufacturing capabilities.

EARNING YOUR TRUST

Innovative engineering, precision manufacturing, exceptional service and expert technical support are cornerstones of our corporate culture and continuous improvement goals. Your trust is our most important asset.

INNOVATION SINCE 1962

An added value to working with Nor-Cal Products is how we apply our vacuum science and industry expertise to your production and research goals and timelines. We continue to develop new component lines and services to serve the demands of the exciting and ever emerging applications that require vacuum components.

Nor-Cal Products

Headquarters: USA

1-800-824-4166 or 530-842-4457

nccsales@n-c.com

www.n-c.com



RoHS2/REACH compliant
Conflict mineral regulations enforced

All data subject to change without prior notice.

Nor-Cal Products



by PFEIFFER VACUUM