

Similar Image



CF blank wire seal flange 22" wire seal flange, blank, male

Part number: WS-22-000M






CF blank wire seal flange

22" wire seal flange, blank, male

- Wire Seal make UHV seals possible in very large flange sizes
- Robust seal tolerant of bakeout to 450C
- Dished shape blanks and other options available
- Contact us at 800-824-4166 if you can't find exactly what you need





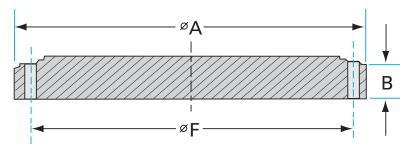

WS-22-000M

| Parameters | Specifications |
|--------------------|-------------------------------------|
| Flange Size | DN 18 (22" OD) |
| Туре | Blank |
| Gender | Male |
| Material | 304 stainless |
| Bore | blank |
| Thickness | 1.50" |
| Bolt Circle | 20.2" |
| Bolt Hole Diameter | 0.656" |
| # Bolt Holes | 36 |
| Vacuum Range | 1 · 10 ⁻¹³ mbar to 1 bar |
| Temperature Range | -200 °C to 450 °C |
| Weight | 167 lbs |

Dimensions
(in inches)

Dim A 22.1"

Dim B 1.50"

Dim C blank

Dim F 20.2"

Dim G 0.656"

www.n-c.com Part number: WS-22-000M NC0721A Page 2

VACUUM SOLUTIONS FOR INDUSTRY & RESEARCH

Nor-Cal Products is a premier global source for custom and standard high and ultra-high vacuum chambers and components critical to the success of industrial, semiconductor, coating, analytics, and research applications. We offer an extensive selection of vacuum line fittings, hardware, valves and components which complement our custom manufacturing capabilities.

EARNING YOUR TRUST

Innovative engineering, precision manufacturing, exceptional service and expert technical support are cornerstones of our corporate culture and continuous improvement goals. Your trust is our most important asset.

INNOVATION SINCE 1962

An added value to working with Nor-Cal Products is how we apply our vacuum science and industry expertise to your production and research goals and timelines. We continue to develop new component lines and services to serve the demands of the exciting and ever emerging applications that require vacuum components.

Nor-Cal Products Headquarters: USA 1-800-824-4166 or 530-842-4457 ncsales@n-c.com www.n-c.com



RoHS2/REACH compliant Conflict mineral regulations enforced



