



Similar Image



ISO-F medium wall flexible hose

ISO-100 OF medium wall SS flexible hose, 10" length


Part number: FH-400-10-2ISO

ISO-F medium wall flexible hose
ISO-100 OF medium wall SS flexible hose, 10" length

- Dampen out pump vibrations with a flex coupling
- Easily join two mis-aligned ports using a flex hose
- Thin, medium and thick wall hoses offer a range of flexibility and robustness
- Standard lengths and flange combinations offered. Others available.
- Contact us at 800-824-4166 if you can't find exactly what you need



Similar Image

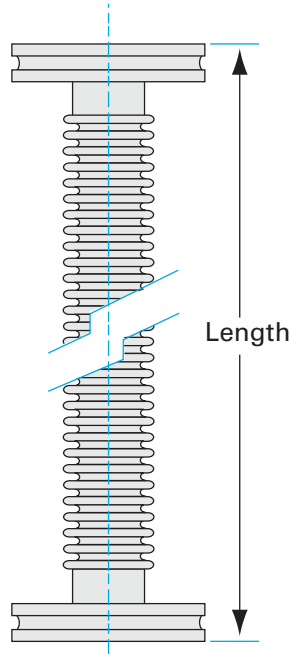

Dimensions (in inches)	
Dim A	12"
Dim B	4.5"
Dim C	4"
Dim D	4.83"
Dim E	0.016"

FH-400-10-2ISO

Parameters	Specifications
Flange Size	DN 100 ISO-K
Type	Flexible Bellows Hose
ID	4"
Length	12"
Wall Thickness	0.016"
Bend Radius	4.5"
Hose Material	321 stainless
Flange & Cuff Material	304 stainless
Vacuum Range	FKM: $1 \cdot 10^{-8}$ mbar to 1 bar Metal seal: $1 \cdot 10^{-10}$ mbar to 1 bar
Temperature Range	FKM: -20 °C to 180 °C Metal seal: -270 °C to 150 °C
Weight	3.7 lbs

VACUUM SOLUTIONS FOR INDUSTRY & RESEARCH

Nor-Cal Products is a premier global source for custom and standard high and ultra-high vacuum chambers and components critical to the success of industrial, semiconductor, coating, analytics, and research applications. We offer an extensive selection of vacuum line fittings, hardware, valves and components which complement our custom manufacturing capabilities.

EARNING YOUR TRUST

Innovative engineering, precision manufacturing, exceptional service and expert technical support are cornerstones of our corporate culture and continuous improvement goals. Your trust is our most important asset.

INNOVATION SINCE 1962

An added value to working with Nor-Cal Products is how we apply our vacuum science and industry expertise to your production and research goals and timelines. We continue to develop new component lines and services to serve the demands of the exciting and ever emerging applications that require vacuum components.

Nor-Cal Products
Headquarters: USA
1-800-824-4166 or 530-842-4457
ncsales@n-c.com
www.n-c.com



RoHS2/REACH compliant
Conflict mineral regulations enforced

All data subject to change without prior notice.

