





# Differentially pumped rotary seals 2.53" ID x 4.5" OD differentially pumped rotary seal

Part number: RS-250






# Differentially pumped rotary seals


### 2.53" ID x 4.5" OD differentially pumped rotary seal

- CF Flanges, tapped holes, one rotational and one stationary
- 360° rotation, two stage, differentially pumped with 360° vernier scale
- Maximum bakeout temperature 150°C
- Vacuum Range > 10-11 mbar (UHV)
- Standard scale 1.0°, mechanical counter 0.1°, micro stepped motor drive required for maximum resolution





Similar Image

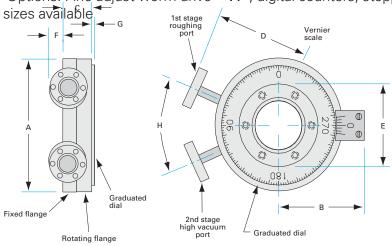

Dimensions (in inches)	
5.75"	
3.64"	
1.36"	
3.58"	
4.50"	
0.490"	
0.030"	
45°	

#### **RS-250**

Parameters	Specifications
Rotary Seal Type	Manual Rotary Actuation
Base Flange / Traveling Flange	DN 63 CF (4.5" OD)
Nominal ID	2-1/2"
Orientation	Any
Max Load (vertical / horizontal)	90 lbs / 38 lbs
Vacuum Range	$1\cdot 10^{\text{-10}}$ mbar to 1 bar (UHV)
Temperature Range	20 °C to 150 °C
Flange Material	304 Stainless
Roughing Ports	DN 16 CF (1.33" OD)
Weight	20 lbs

www.n-c.com Part number: RS-250 NC0721A Page 2

# **VACUUM SOLUTIONS FOR INDUSTRY & RESEARCH**

Nor-Cal Products is a premier global source for custom and standard high and ultra-high vacuum chambers and components critical to the success of industrial, semiconductor, coating, analytics, and research applications. We offer an extensive selection of vacuum line fittings, hardware, valves and components which complement our custom manufacturing capabilities.

## **EARNING YOUR TRUST**

Innovative engineering, precision manufacturing, exceptional service and expert technical support are cornerstones of our corporate culture and continuous improvement goals. Your trust is our most important asset.

## **INNOVATION SINCE 1962**

An added value to working with Nor-Cal Products is how we apply our vacuum science and industry expertise to your production and research goals and timelines. We continue to develop new component lines and services to serve the demands of the exciting and ever emerging applications that require vacuum components.

Nor-Cal Products Headquarters: USA 1-800-824-4166 or 530-842-4457 ncsales@n-c.com www.n-c.com



RoHS2/REACH compliant Conflict mineral regulations enforced



